

Applications:

Suitable for commercial, retail and institutional applications including gymnasiums, factories and warehouses.

Features

- Offering quality lighting and excellent energy savings compared to linear fluorescent and HID highbay fixtures.
- Voltage is 120-277V & 347V/480V.
- Motion Sensor optional and supports Emergency Battery.
- Lumen output from 11800-40000lm with efficacy up to 141lm/W.
- Standard 0-10V dimming available.
- Projected life span of 50,000 hrs.
- Operating temperature is -40°C to 55°C (-40°F to 131°F) .
- UL/cUL and DLC qualified.
- FCC compliant.

90W



130W&180W&205W



270W&300W



Housing
Advanced thermal management aluminum alloy with white coat finish.
Suitable for pendent mount and Sling mount.

Threaded Conduit
Support wires coming from the hole for easier wire connections.


Emergency Battery
90min, 900lm

Motion Sensor
Optional PIR sensor allows for security and energy saving.



Wireless Lighting Control System

G5 Smart Wireless Lighting Controls System is an indoor or outdoor wireless control system for the parking lot, street, roadway and commercial lights. The unique technology inside this system enables customer to remote monitor and operate all fixtures through a Web-enabled central management system. Customer can use any Internet enabled equipment, such as smart phone, computer or tablet, to access the user portal of the system.

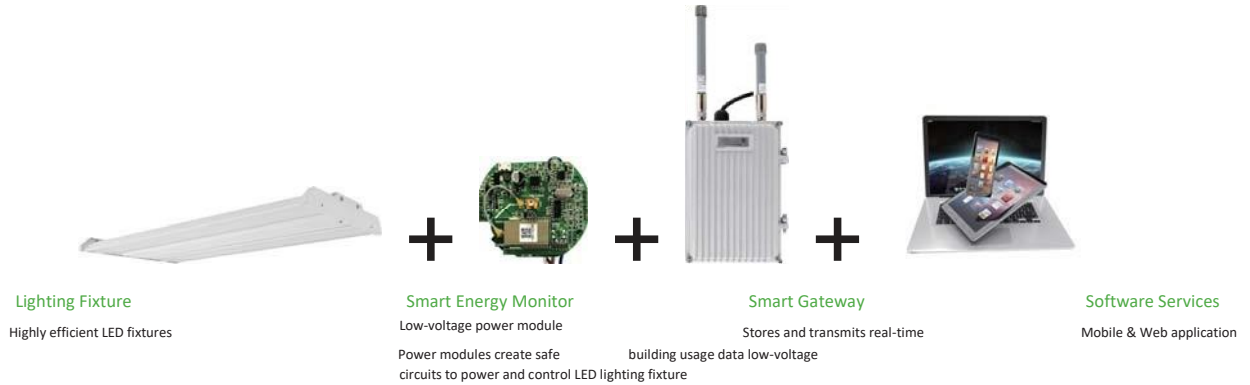

Features

- Accurate, utility-grade energy metering per fixture or per circuit
- Stores days of energy data in local memory in case of network outage and automatically synchronize data with central database once network recovers
- Provides real-time (less than 100ms response time) protection on fixtures from the out of range voltage
- Real-time detects the theft of electricity and reports time, wattage and location to the operation center
- Automatically download programmed schedules
- Maintain a redundant mesh network through encrypted connections
- Integrated with latest video surveillance system
- Provide integration interface on the control board and software platform. Capable of integration with police and city management system

PERFORMANCE DATA



SYSTEM WATTS	VOLTAGE	CRI	4000K		5000K	
			LUMENS	LPW	LUMENS	LPW
90W	120-277VAC/347-480V	80	11800lm	131lm/W	12000lm	133lm/W
130W	120-277VAC/347-480V	80	17800lm	137lm/W	18000lm	138lm/W
180W	120-277VAC	80	23800lm	132lm/W	24000lm	133lm/W
190W	347/480VAC	80	23800lm	125lm/W	24000lm	126lm/W
205W	120-277VAC	70	28700lm	140lm/W	29000lm	141lm/W
210W	347/480VAC	70	28700lm	137lm/W	29000lm	138lm/W
270W	120-277VAC/347-480V	80	35600lm	132lm/W	36000lm	133lm/W
300W	120-277VAC/347-480V	80	40000lm	133lm/W	40000lm	133lm/W

ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	2270	90	120	0.75
		90	208	0.43
		90	240	0.38
		90	277	0.32
	2400	90	347	0.26
		90	480	0.19
2	3040	130	120	1.08
		130	208	0.63
		130	240	0.54
		130	277	0.47
	3200	130	347	0.37
		130	480	0.27
2	4540	180	120	1.50
		180	208	0.87
		180	240	0.75
		180	277	0.65
		190	347	0.55
		190	480	0.40
2	5200	205	120	1.71
		205	208	0.99
		205	240	0.85
		205	277	0.74
		210	347	0.61
		210	480	0.44
4	6520	270	120	2.25
		270	208	1.30
		270	240	1.13
		270	277	0.97
	6400	270	347	0.78
		270	480	0.56
4	7200	300	120	2.50
		300	208	1.44
		300	240	1.25
		300	277	1.08
	7400	300	347	0.86
		300	480	0.63


DIMENSIONS

unit: inch/mm

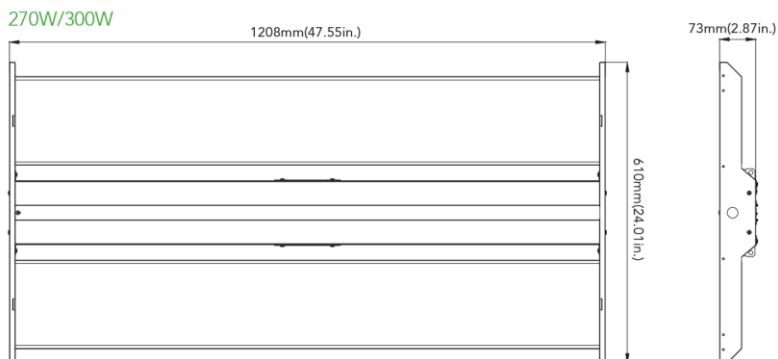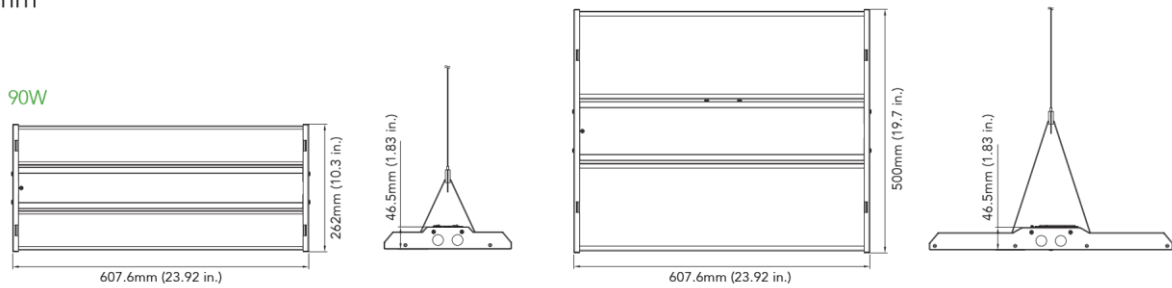

PHOTOMETRICS

General



ORDERING GUIDE Example: MLH03130W27VXXKYYY

Fixture Type <input type="text"/>	Wattage <input type="text"/>	Voltage <input type="text"/>	CCT <input type="text"/>	Lens <input type="text"/>	Sensor (Option) <input type="text"/>	Backup Battery (Option) <input type="text"/>
MLH03 Linear high bay series	90 90W 130 130W 180 180W 190 190W 205 205W 210 210W 270 270W 300 300W	27V 120-277V 48V 347-480V 347/480V	40K 4000K 50K 5000K	CD Clear Diffuser	M Motion Sensor Blank Without Sensor	B Emergency Battery Blank Without Emergency Battery

Note: 1. The wattage is 180W when the voltage is 120-277V, while the voltage is 347/480V, the wattage is 190W.
 2. The wattage is 205W when the voltage is 120-277V, while the voltage is 347/480V, the wattage is 210W.
 3. 205W and 210W (standard 70 CRI), others (standard 80 CRI).