

# FLOOD LIGHT(MFD08)



## DESCRIPTION

The MFD08 luminaire is a high performance LED lighting solution designed with optical versatility and a slim, low profile design. Its rugged cast aluminum housing minimizes wind load requirements and features an integral, watertight LED driver compartment and high performance aluminum heat sinks. Markets include parking lots, walkways, campuses, car dealerships, office complexes, and internal roadways.



## SPECIFICATION FEATURES

### Construction

- Housing, electrical compartment and fitter are all made from die case aluminum that is pre-treated and powder-coated to meet the most rugged industry standards.
- Door frame features an integral accessory channel for the mounting of optional light control accessories.
- Vented housing isolates LED module from driver, maximizing product life and performance
- Doorframe seals to housing with a continuous extruded silicone gasket.

### Optics

- Optics(NEMA Type): 7H\*6V.
- Scalable Lumen Packages from 1,950 to 25,200 Lumens.
- Provides the best combination of vertical and horizontal illumination while reducing light behind the poles.
- High performance acrylic optic securely attached to internal heat sink for maximum thermal dissipation.

### Electrical

- Universal 120-277 VAC or 347-480 VAC input voltage.
- Both drivers have a power factor >90%, THD <20%, and an expected life of 100,000 hours.

### Warranty

- Five-year warranty.

### PHOTOMETRICS


7Hx6V

### ACCESSORIES

**Photocell**  
No. PC-JL-120-277V  
USE: Photocell is field installed or pre-installed in factory by requesting

## DIMENSIONS

unit: mm/inch

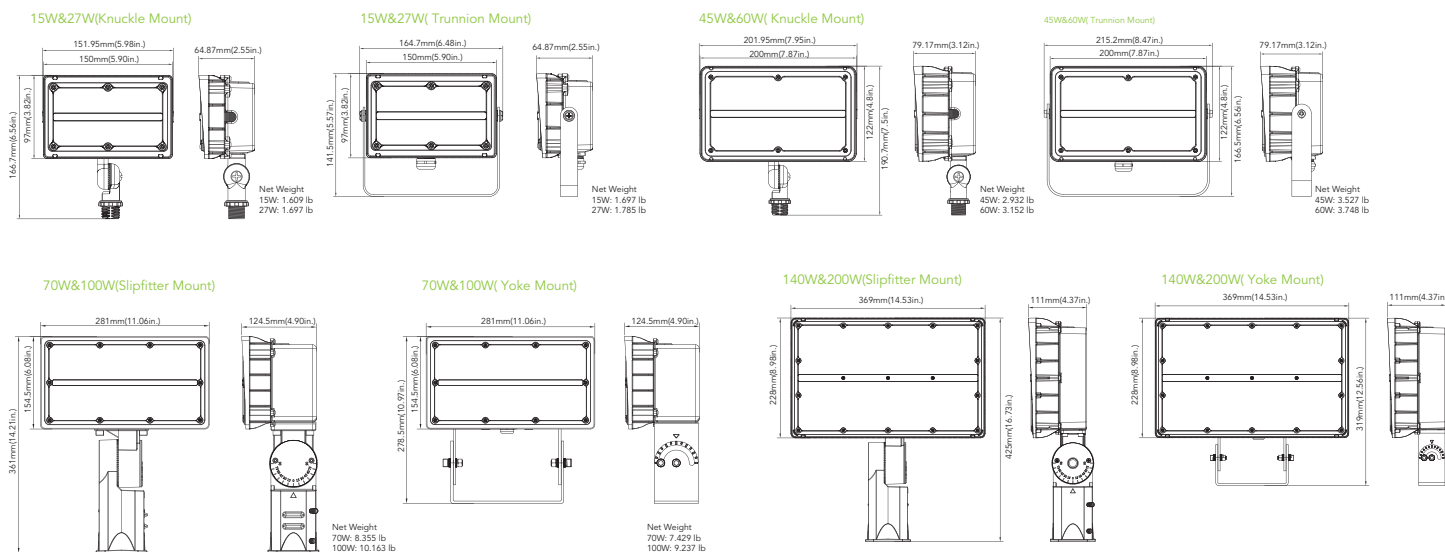

## PERFORMANCE DATA

SYSTEM WATTS	VOLTAGE	DIST.TYPE	CRI	LUMENS (3000K)	LPW (3000K)	LUMENS (4000K)	LPW (4000K)	LUMENS (5000K)	LPW (5000K)
15W	120-277V	7Hx6V	70	1950lm	130 lm/W	2000lm	133 lm/W	2000lm	133 lm/W
27W	120-277V	7Hx6V	70	3500lm	130 lm/W	3600lm	133 lm/W	3600lm	133 lm/W
45W	120-277V	7Hx6V	70	5550lm	123 lm/W	5650lm	126 lm/W	5650lm	126 lm/W
60W	120-277V	7Hx6V	70	7250lm	121 lm/W	7450lm	124 lm/W	7450lm	124 lm/W
60W	347-480V	7Hx6V	70	7500lm	125 lm/W	7600lm	127 lm/W	7600lm	127 lm/W
70W	120-277V	7Hx6V	70	8700lm	124 lm/W	8900lm	127 lm/W	8900lm	127 lm/W
70W	347-480V	7Hx6V	70	9100lm	130 lm/W	9300lm	133 lm/W	9300lm	133 lm/W
90W	347-480V	7Hx6V	70	12000lm	133 lm/W	12400lm	138 lm/W	12400lm	138 lm/W
100W	120-277V	7Hx6V	70	13100lm	131 lm/W	13300lm	133 lm/W	13300lm	133 lm/W
140W	120-277V/347-480V	7Hx6V	70	17100lm	122 lm/W	17500lm	125 lm/W	18000lm	128 lm/W
200W	120-277V/347-480V	7Hx6V	70	24600lm	123 lm/W	25200lm	126 lm/W	26000lm	130 lm/W

# ELECTRICAL DATA

Number Of Drivers	Driver Current (mA)	Nominal Power (W)	INPUT VOLTAGE (V)	CURRENT (Amps)
1	250	15	120	0.13
		15	208	0.07
		15	240	0.06
		15	277	0.05
1	430	27	120	0.23
		27	208	0.13
		27	240	0.11
		27	277	0.10
1	770	45	120	0.38
		45	208	0.22
		45	240	0.19
		45	277	0.16
1	920	60	120	0.50
		60	208	0.29
		60	240	0.25
		60	277	0.22
1	1600	60	347	0.17
		60	480	0.13
1	1750	70	120	0.58
		70	208	0.34
		70	240	0.29
		70	277	0.25
1	1850	70	347	0.20
		70	480	0.15
1	2600	100	120	0.83
		100	208	0.48
		100	240	0.42
		100	277	0.36
2	2400	90	347	0.26
		90	480	0.19
2	3500	140	120	1.17
		140	208	0.67
		140	240	0.58
		140	277	0.51
2	3700	140	347	0.40
		140	480	0.29
2	5200	200	120	1.67
		200	208	0.96
		200	240	0.83
		200	277	0.72
		200	347	0.58
		200	480	0.42

## MOUNTING

1/2"NPS Knuckle Mount (15W/27W/45W/60W)



Trunnion Mount (15W/27W/45W/60W)



Yoke Mount(70W/100W/140W/200W)



Slipfitter Mount(70W/100W/140W/200W)



## ORDERING GUIDE

Example:MFD0845W27V50KYYYYYY

Fixture Type	Wattage	Voltage	CCT	Dimmable	Finish	Photocell (Option)	Nema	Mounting	Internal Code
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
<b>MFD08</b> Flood Light series	<b>15</b> 15W <b>27</b> 27W <b>45</b> 45W <b>60</b> 60W <b>70</b> 70W <b>90</b> 90W <b>100</b> 100W <b>140</b> 140W <b>200</b> 200W	<b>27V</b> 120-277V <b>48V</b> 347-480V	<b>30K</b> 3000K <b>40K</b> 4000K <b>50K</b> 5000K	<b>D</b> 0-10VDIM <b>Blank</b> NO DIM	<b>D</b> Dark Bronze <b>B</b> Black <b>W</b> White	<b>P0</b> With Photocell <b>Blank</b> Without Photocell	<b>B76</b> 7HX6V	<b>TR</b> Trunnion Mount <b>KN</b> Knuckle Mount <b>YK</b> Yoke <b>SP</b> Slipfitter Mount	<b>Blank</b> <b>Alphanumeric</b>

Note: Only the large size has DIM option.